

Hot Ink Coder



DK-1100A

Applications :

Ink roll coding machine is suitable for all kinds of horizontal and vertical packing machines to automatic print production date, lot/ batch number & other related information

Technical Detail:

- Print Area Axial 40mm Radial 40.5mm
- Printing Lines T-type 13lines Max. 20 character s/line
R-type 10lines Max. 13 characters/line
- Type T-type 1.5, 2.0, 2.5, 3.0mm(W)*3.5mm(H)
R-type 3.5mm(W)*3.5, 4.5, 5.5mm(H)
- Cycle Rate Up to 300 cycles / minute
- Surface Speed Up to 40 meters / minute
- Min. print space 70mm for 2-up Type Holder/
38mm for 4-up Type Holder
- Type Rotation Direction Clockwise (Fixed)/ Counter clockwise (Fixed)
- Ink Roll 36*40mm

Thermal Transfer Printer

TTP-03

Applications :

Thermal Transfer use in Intermittent & Continuous Package Machines & Labeling Machine to Print Barcode, QR code, Logo, Images, Variable data, Tables, Nutrition List, Serial Numbers etc.

Technical Detail:

- Print Head 32mm, 300DPI
- Print Area Intermittent-32mm*60mm
Continuous-32mm*100mm
- Ribbon Size W-33MM, L-600(Max.)
- Print Frequency Intermittent: up to 450PPM
Continuous: up to 40meters
- Power AC110~220V, 50/60Hz, 150W
- Air Supply 6bar/90PSI(MAX)



Multilane Printer



NS-506M

Applications :

It is suitable for all kinds of multi-head continuous or intermittent packing machines to automatic print production date, lot number and other related information

Technical Detail:

- Driver Stepper Motor
- Power Supply 220V/50Hz
- Power 600W
- Print Speed 300 Times/min
- Font Size 2 x 3.4 x 7.2mm
- Consumable Ink roll
- Weight 15kg
- Dimension (LxWxH) 550x195x240mm

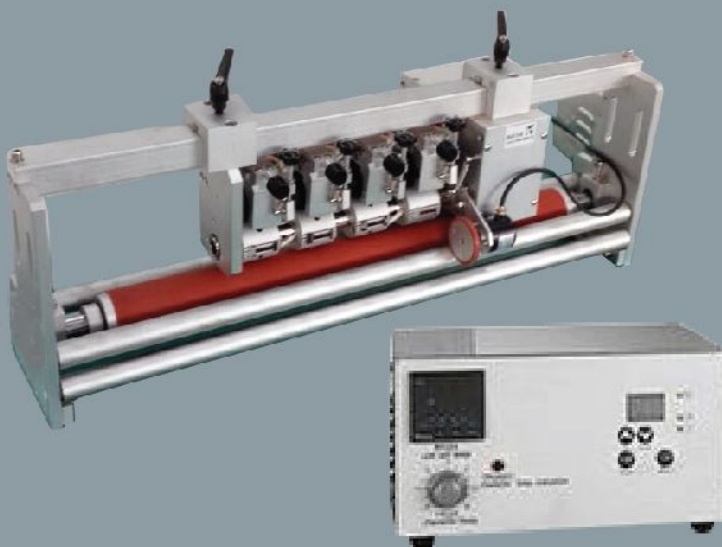

Coder Series